



Screen failure Pebble Steel

Display problem repair the pebble samrtwatch steel. The screen was unreadable and solve this simple repair

Written By: Marcos Garcia



INTRODUCTION

First of all we must have a clean space and a T-5 screwdriver and a flat 1.5

Step 1 — dismantle belts




- The first is to remove the belt. We will use a 1.5 mm flat screwdriver

Step 2 — Dismantle rear cover





- Dismantle the cover of the watch using a screwdriver T-5, and taking care with the rubber gasket having, we will remove the metal cover.

Step 3 — Search and cut a soft rubber

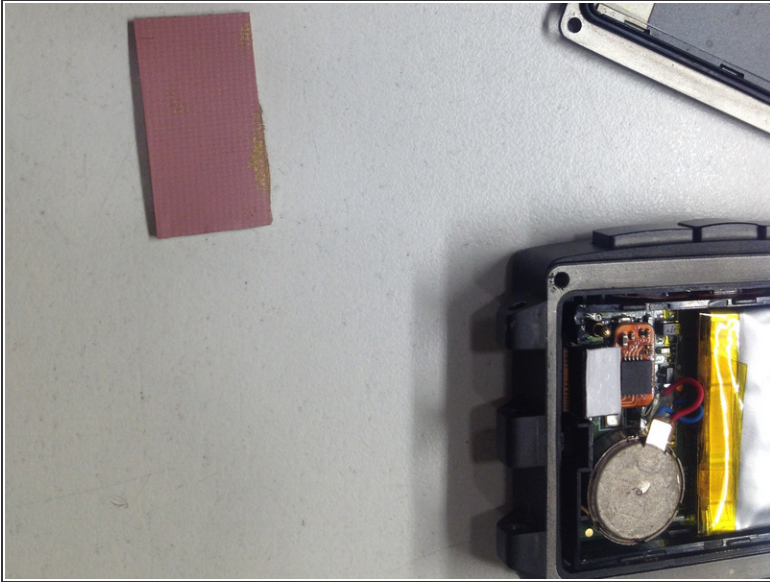

- This step will look for a dissipative of carrying notebooks for microprocessor silicone. Not having it could use a piece of soft rubber, not exceeding 0.65mm thick

Step 4 — place rubber

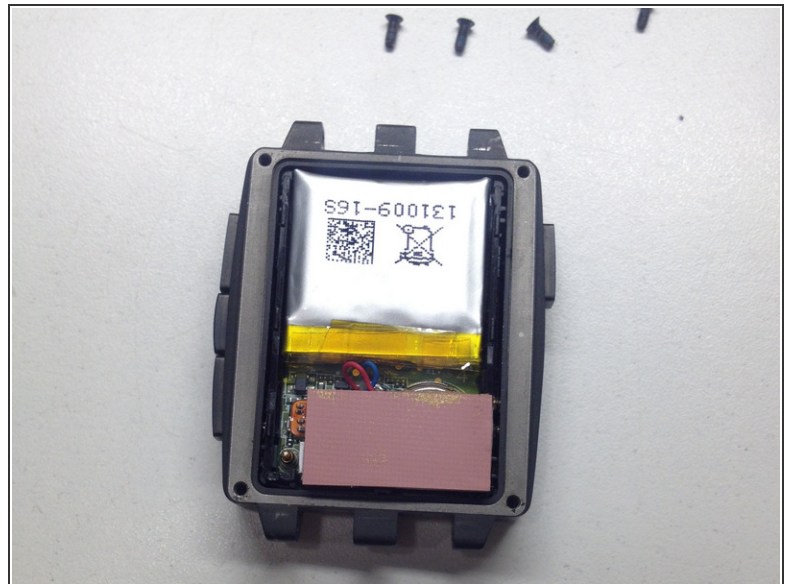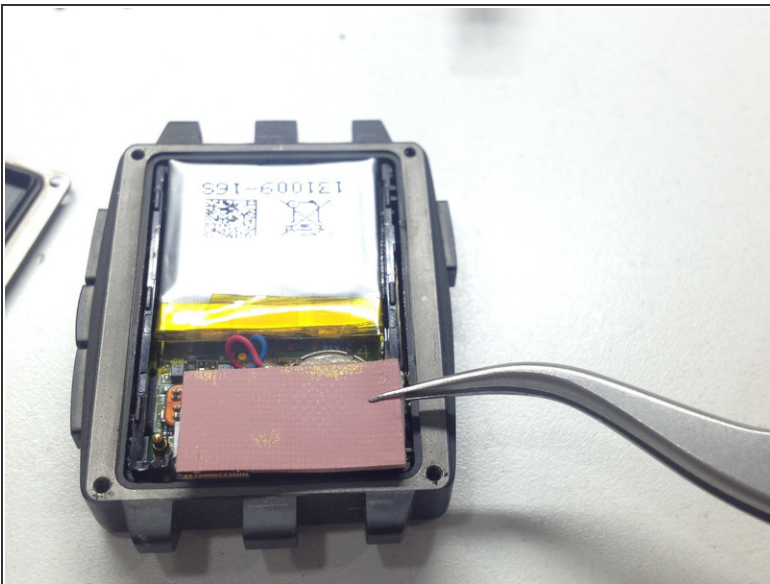

- We will put this paste on the bottom right of the watch, on the vibrator and connector corner of the screen. You have to clear the gold-plated connector on the left as it makes contact with the lid.

Step 5 — Close and READY !!!!



- Finally we set the clock by reversing the steps. *'++ Is important to place the lid put first the two screws above and then the bottom two.'* (This forces all internal chassis, thus exerting pressure on the rubber contact of the screen.)

Para reensamblar tu dispositivo, sigue estas instrucciones en orden inverso.

This document was last generated on 2017-07-02 05:05:37 AM.